
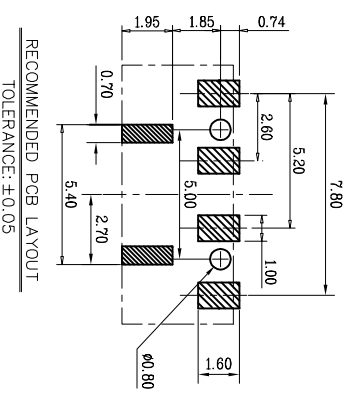








REV.	EGN.NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31



- NOTES:
- ELECTRICAL PERFORMANCES:
 - RATING CURRENT: 2A
 - RATING VOLTAGE: 100VAC
 - CONTACT RESISTANCE: 50 Ω m
 - INSULATION RESISTANCE: 1000 Ω m
 - DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MINUTE
 - MECHANICAL PERFORMANCE:
 - DURABILITY: 5000TIMES
 - NORMAL FORCE AT WORKING POSITION: 80gf Min.
 - OPERATION TEMPERATURE: -40° C~+85° C.

ITEM	DESCRIPTION	QUANTITY	MATERIAL	FINISH	REMARK
①	HOUSING	1	TEMPERATURE RESISTANT COLOR BLACK		
②	CONTACT	4	COPPER ALLOY	NI PLATING OVER ALL	
③	PAD	2	STAINLESS STEEL	NI PLATING OVER ALL	

GENERAL	TOLERANCE	DWG NO.	JYSA1014-03	APPD:	WIND	Scale	1:1
X.±0.45	X.±5'	Title	BATTERY 4PIN 2.60PITCH	CHKD:		UNIT	mm
X.±0.35	X.±2'		3.5H 有柱	DR:			
.XX±0.25	.XX±1'	Part NO.	JYS-BY350-180	Date	2011/10/31		
.XXX±0.15	.xxx±0.5'						
SHEET	1/1						



深圳市杰宇森电子有限公司
Shenzhen JieYusen electronic co., LTD.